




Type MF

Specifically developed for use with MetFloor® 60 and MetFloor® 80 profiles manufactured by Composite Metal Flooring (CMF®).




Bracket: Steel strip, zinc plated + JS500
Wedge: Malleable iron, zinc plated.

Product Code	Rod min 4.6	Safe Working Load (FOS 3:1)	Tightening Torque Nm
		Tensile / 1 Rod kN	
MF06	M6	1.47	10
MF08	M8	1.47	10
MF10	M10	1.47	10

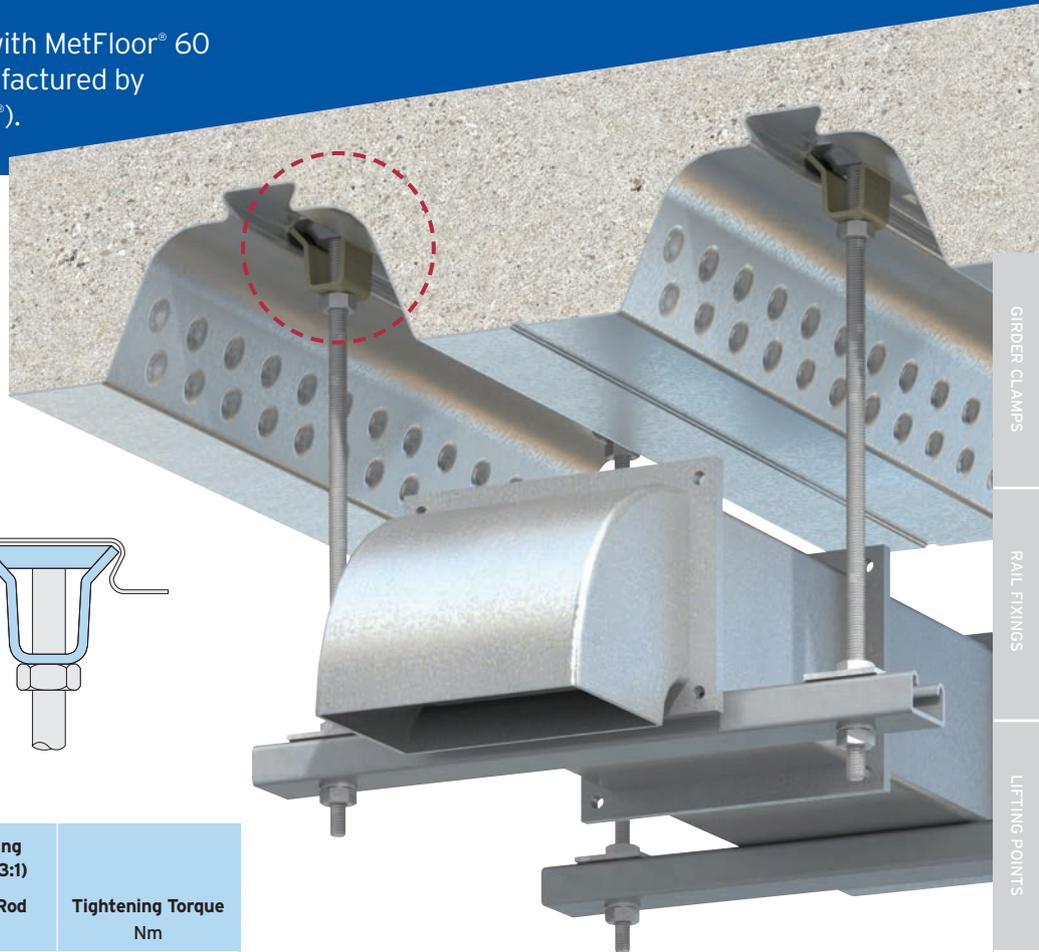

➤ Although the Type MF is similar in appearance to the Type MW2 (page 66), it should NOT be used in profiles manufactured by Kingspan® Structural Products.

How to install...

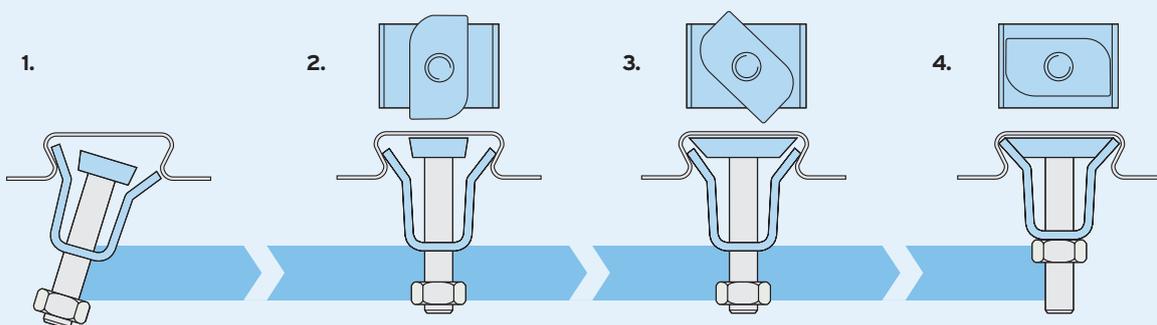

- 1) Pre-assemble the bracket and wedge (flat surface facing up) onto the threaded rod and insert one side of the bracket into the re-entrant channel of decking.
- 2) Insert the other side of the bracket into position inside the decking.
- 3) Turn the wedge clockwise until the position in Fig. 4 has been achieved.
- 4) Tighten the nut on the rod to a torque of 10Nm (prevent rod from rotating).



➤ Install the decking fixings after the concrete has been poured and has reached full strength.

➤ If the decking profile is deformed or distorted, do not install the fixing. If in doubt, contact the Technical Support team for advice.

Product Comparison

The table below shows the various components that are designed to fit the decking profiles of major manufacturers such as Composite Metal Flooring (CMF®), Kingspan® Structural Products and Structural Metal Decks (SMD).

Components

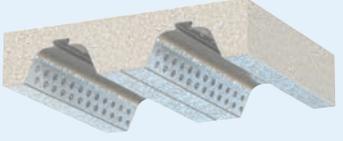Lindapter Decking Fixing	Compatible Composite Decking Profile(s)
<p>Type TR60 page 64</p> 	<p>Structural Metal Decks (SMD) TR60+ and TR80+</p>  
<p>Type MF page 65</p> 	<p>Composite Metal Flooring (CMF®) MetFloor® 60 and MetFloor® 80</p>  
<p>Type MW2 - Multiwedge 2 page 66</p> 	<p>Kingspan® Structural Products Multideck® 60 and Multideck® 80</p>  
<p>Type AW - Alphawedge page 67</p> 	<p>Hare Decking (formerly Richard Lees®) Ribdeck® E60</p>  
<p>Type SD2 - Slimdek 2 page 68</p> 	<p>Tata Steel® Europe ComFlor® 225</p>  
<p>Type VN page 69</p> 	<p>Fits several profiles including: R51 (SMD), ComFlor® 51 (Tata Steel®), Holorib® (Hare Decking), Superib® (Hare Decking), Multideck® 50 (Kingspan®) and MetFloor® 55 (CMF®)</p> 

Also available

Type TC - Toggle Clamp
page 69



Designed for:

Service suspension from pre-cast hollow core slabs (minimum core depth of 75mm) as well as Structural Hollow Section (SHS), steel sheeting or purlins.

